



Item No. _____
Project _____
Quantity _____

Electric, Counter Top Fryer

Model: C28



Model C28

PERFORMANCE GUIDE

Power Input	12-kW
Fat Capacity	30 lbs.
Preheat Time [350°F]	7 minutes
Frozen Fries Production	68 lbs./hr

SHORT/BID SPECIFICATION

Fryer shall be a **LANG Manufacturing Model C28**, a 15" wide counter top electric heated unit with 12-kW power input; 30 pound shortening capacity and 68 lbs/hr frozen fries production capacity; twin half size baskets with manual basket lifts; all stainless steel tank and exterior; plus the features listed and options/accessories checked:

STANDARD PRODUCT WARRANTY

- One year, parts & labor
- Fry pot is guaranteed to never leak.

CONSTRUCTION FEATURES

- One piece heavy duty 430 Series stainless steel exterior, with attractive No. 4 finish
- Stainless steel fry kettle
- 12-kW [total] rod type low watt density heating elements
- Twin frying baskets with manual basket lift system
- Front mounted oil drain ball valve

PERFORMANCE FEATURES

- High production from a 15" wide counter top unit
- Kettle and element design provide a large cool zone where food particles can collect
- Low watt density heating elements provide even heating and extend shortening life
- Heating elements hinge up and out of kettle for easy cleaning
- All service is done from front, without moving the unit

CONTROL PACKAGE

- Power ON-OFF switch
- Thermostat
- POWER, HEAT & OVER TEMP indicator lights



Sheet No. **LSP-F1** (rev. 9/03)


INSTALLATION REQUIREMENTS

- (E) Single 208V or 240V, 3-phase or optional 480V, 3-Phase electrical connection

- Installation under approved vent hood required. Consult local codes. [Power connection from rear or bottom. See below]

OPTIONS & ACCESSORIES

- ☐ Full-size basket
- ☐ Half-size basket [two provided]
- ☐ Quick disconnect grease drain pipe
- ☐ 480 Volt, 3-phase model
- ☐ 4" adjustable legs

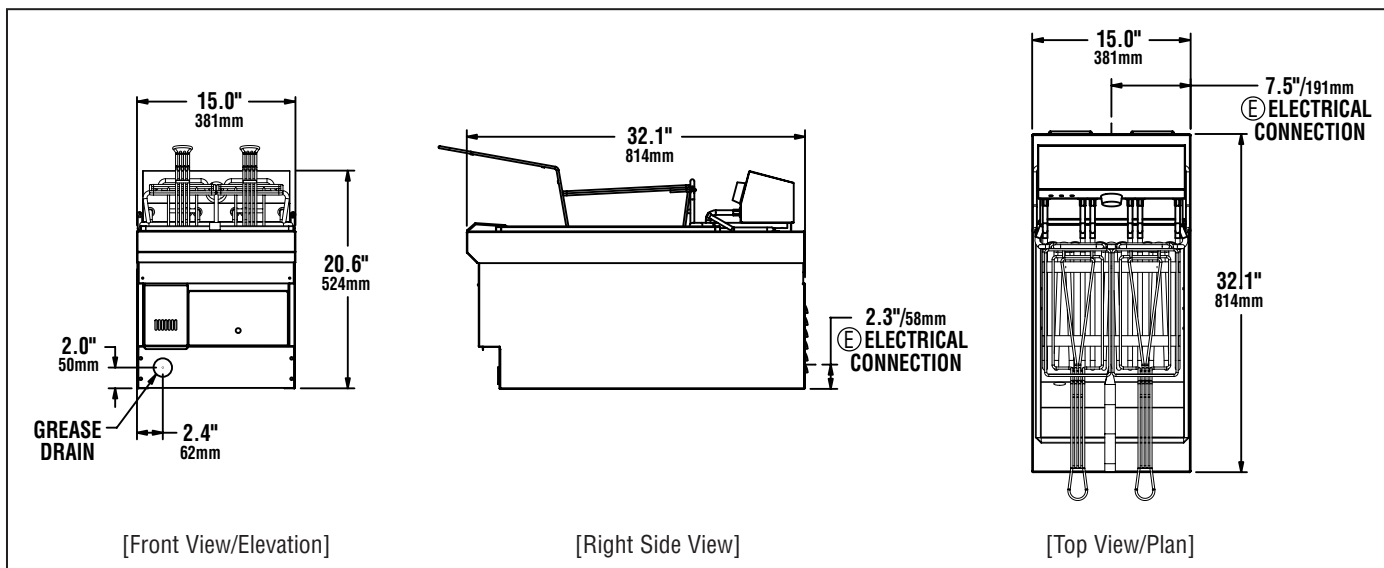

Model	Height x Width x Depth	Clearance from combustible surface	Weight		Freight Class
			Actual	Shipping	
C28	20.6" x 15.0" x 32.1" 524mm x 381mm x 814mm	Sides: 0" Back: 0"	100 lbs. 45 kg	115 lbs. 52 kg	85

Model	(E) Electrical Requirements			
	Voltage	Total kW	Phase	Amps/Line
C28	208V/60Hz	12.0	3	33.3
	240V/60Hz	12.0	3	28.9
	480V/60Hz	12.0	3	14.4

CAD SYMBOLS & PRICING



Due to continuous improvements, specifications subject to change without notice.



Sheet No. LSP-F1 (rev. 9/03)

LANG MANUFACTURING COMPANY • 6500 Merrill Creek Parkway, Everett, WA 98203
TOLL FREE: 800.882.6368 • FAX: 425.349.2733 • www.langworld.com