



6055A



6055A-43







NEMCO Food Equipment, LTD. 301 Meuse Argonne P.O. Box 305 Hicksville, OH 43526 Phone (419) 542-7751 FAX (419) 542-6690 www.nemcofoodequip.com

| Item No | _ |
|----------|-------|
| Quantity | _ |


Model No. 6055A, 6055A-CW, 6055A-220, 6055A-43 Counter Top Warmers

Add side dishes and entrees to existing lines or create entirely new temporary buffet lines quickly and easily with NEMCO's full-size countertop warmers. You'll enjoy greater menu flexibility and the ability to respond efficiently to changing menu requirements. Plus the reliable adjustable thermostat helps to ensure that food held in serving lines is always within your food safety temperature guidelines. Unique heating system design provides even heat distribution to prevent "hot spots". Heavy-duty stainless steel well.

Standard Features:

- Heavy duty stainless steel construction
- Adjustable thermostat 120°F to 212°F
- Heating system design allows for fast preheat, and extended life of unit
- Accepts a 12"x20" full size pan or fractional sizes
- Adapter bars and plates available for additional sizes
- Cycling indicator pilot light
- Temperature indicator settings: High, Medium,
- UL, CUL, and NSF listing
- CE listing on model 6055A-220

Model No. 6055A, 6055A-CW, 6055A-43, 6055A-220

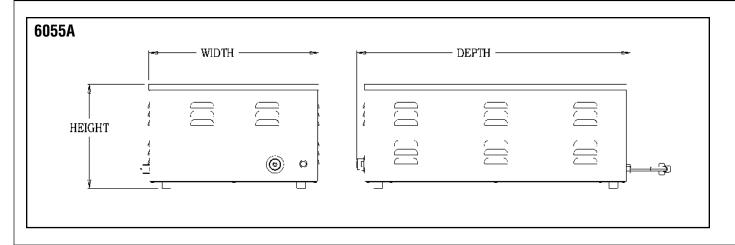

| Specifications: | | | | | | | | | | |
|-----------------|-------------------------------|-------------------|----------------------|-----------------------|---------|------------------|-----------------|-----------------------|--------------------------|---------------------------------|
| Model No. | Pre-heat time to 180° F | Width Inches/(cm) | Depth Inches/(cm) | Height Inches/(cm) | Voltage | Rated Wattage | Nominal Amps | Plug Configuration | Unit Weight Ibs./(Kg) | Shipping Weight Ibs./(Kg) |
| 6055A | 12 min. | 14 5/8 (37.1) | 23 7/8 (60.7) | 9 (22.9) | 120 | 1200 | 10 | NEMA 5-15P | 19 1/2 (8.9) | 24 (11) |
| 6055A-CW | 10 min. | 14 5/8 (37.1) | 23 7/8 (60.7) | 10 1/2 (26.7) | 120 | 1500 | 12.5 | NEMA 5-15P | 23 (10.5) | 27 (12.3) |
| 6055A-220 | 12 min. | 14 5/8 (37.1) | 23 7/8 (60.7) | 9 (22.9) | 220 | 1200 | 5.5 | CEE-7-7 | 19 1/2 (8.9) | 24 (11) |
| 6055A-43 | 14 min. | 14 5/8 (37.1) | 31 (78.8) | 10 1/2 (26.7) | 120 | 1500 | 12.5 | NEMA 5-15P | 28 (12.7) | 34 (15.4) |

| Accessories for 6055A | Description | | | | |
|-----------------------|--|--|--|--|--|
| □ 66092 | Two-hole adaptor plates for one 7qt. & one 11qt. inset | | | | |
| □ 66093 | Two-hole adaptor plate for two 7qt. insets | | | | |
| □ 66095 | 20" adaptor bar | | | | |
| □ 66096 | 12" adaptor bar | | | | |
| □ 66097 | 6" adaptor bar | | | | |
| □ 66860 | Three-hole adaptor plate for three 4qt. insets | | | | |
| Accessories | | | | | |
| for 6055A-43 | | | | | |
| □ 67763 | Two-hole adaptor plates for two 11qt. insets | | | | |
| □ 68591 | Three-hole adaptor plate for three 7qt. insets | | | | |
| □ 68592 | Four-hole adaptor plate for four 4qt. insets | | | | |

Typical Specifications

NEMCO countertop warmers shall be constructed with 300 series stainless steel wells and 400 series stainless steel cabinets. They shall have tubular heating elements attached to an aluminum heat dissipating plate. All models shall have an adjustable (up to 212° F) conduction thermostat and a pilot light that cycles with the operation of the heating element. 120V models shall have a cord and NEMA 5-15P plug while the 220V model shall have a cord and CEE 7-7 plug. Models 6055A, 6055A-CW, and 6055A-43 shall be UL and CUL and NSF listed. Model 6055A-220 shall be CE and NSF listed.

