

Job _____
Item# _____

Platinum Series

Standard Features

- 36"-wide sectional range with full-width griddle available with a standard-oven base, convection-oven base, cabinet base, or as a modular unit (for mounting on countertop, refrigerated or freezer base)
- Six 16,000 BTU NAT (14,000 BTU LP) burners with three control knobs
- Electronic pilot ignition - Piezo
- 1" thick griddle plate with side and rear splashers
- 9-1/4" deep front rail
- Removable stainless steel grease drawer
- Stainless steel front, sides, rear and exterior bottom
- Fully insulated lining and burner box
- 1-1/4" front gas manifold and 1" rear gas connection
- 5" high stainless steel flue riser
- Free battery-design assistance
- Warranty: two years on specified operational parts and one year on labor from date of purchase

Standard Features of Thermostatic Griddle Models

- "Insta-On" thermostatic control of griddle surface temperature in the range 180°F to 400°F


Standard Features of Oven-Base Models

- 45,000 BTU NAT (42,000 BTU LP) oven with standing pilot
- Cool-to-the-touch handle
- Porcelain enamel interior
- Oven racks (2 for standard oven, 3 for convection oven)
- "Insta-On" thermostat ranging from 175°F to 550°F
- Standard-oven interior is large enough (26" by 26-1/2") for sheet pans to fit either way
- Convection-oven models have 1/3 hp, two-speed blower

Standard Features of Cabinet-Base Models

- Stainless steel cabinet with removable doors that open from the center

- P36N-GGG (Modular Mount)
- P36C-GGG (Cabinet Base)
- P36D-GGG (Standard-Oven Base)
- P36A-GGG (Convection-Oven Base)
- P36N-TTT (Modular Mount with Thermostatic Griddle)
- P36C-TTT (Cabinet Base with Thermostatic Griddle)
- P36D-TTT (Standard-Oven Base with Thermostatic Griddle)
- P36A-TTT (Convection-Oven Base with Thermostatic Griddle)

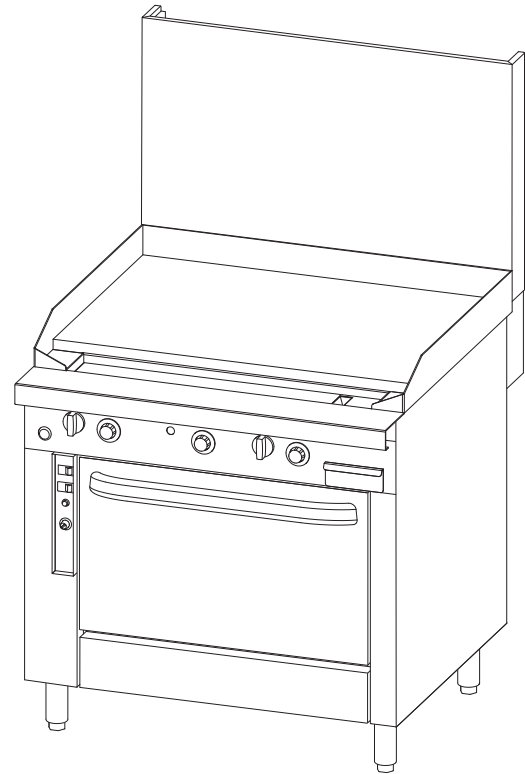

Model P36A-TT with optional 24" flue riser

STANDARD CONSTRUCTION SPECIFICATIONS

Exterior Finish: Front, sides, rear and exterior bottom constructed of #3 polished 430 and 304 stainless steel.

Range: 36"-wide front-manifold sectional range with full-width 96,000 BTU NAT (84,000 BTU LP) griddle with 1" thick stainless steel surface with side and rear splashers and grease drawer.

Front Rail: 9-1/4" deep front rail.

Flue Riser: 5" Standard, Optional 24" or 36" high flue riser with optional shelves (one on 24" flue riser, two on 36" flue riser). Standard shelves are solid.

Battery: Unit can be in any position in a battery. If the unit is at the end of the battery, the end side will be solid (rather than have a coverplate over the end of the front manifold).

Legs: 6" stainless steel adjustable legs standard.


Model 36D: 45,000 BTU NAT (42,000 BTU LP) oven with standing pilot and thermostat range of 175°F to 550°F (79°C to 288°C). Porcelain enamel interior, measuring 14" high x 26" wide x 26.5" deep. Two racks with five-position side rails.

Model 36A: 45,000 BTU NAT (42,000 BTU LP) convection oven with standing pilot and thermostat range of 175°F to 550°F (79°C to 288°C). Porcelain enamel interior, measuring 14" high x 26" wide x 24" deep. Three racks with five-position side rails. Two-speed, 1/3 hp blower motor.

Model 36C: Stainless steel cabinet base with two removable doors that open from the center.



Models: P36N-GGG P36C-GGG P36D-GGG P36A-GGG P36N-TTT P36C-TTT P36D-TTT P36A-TTT

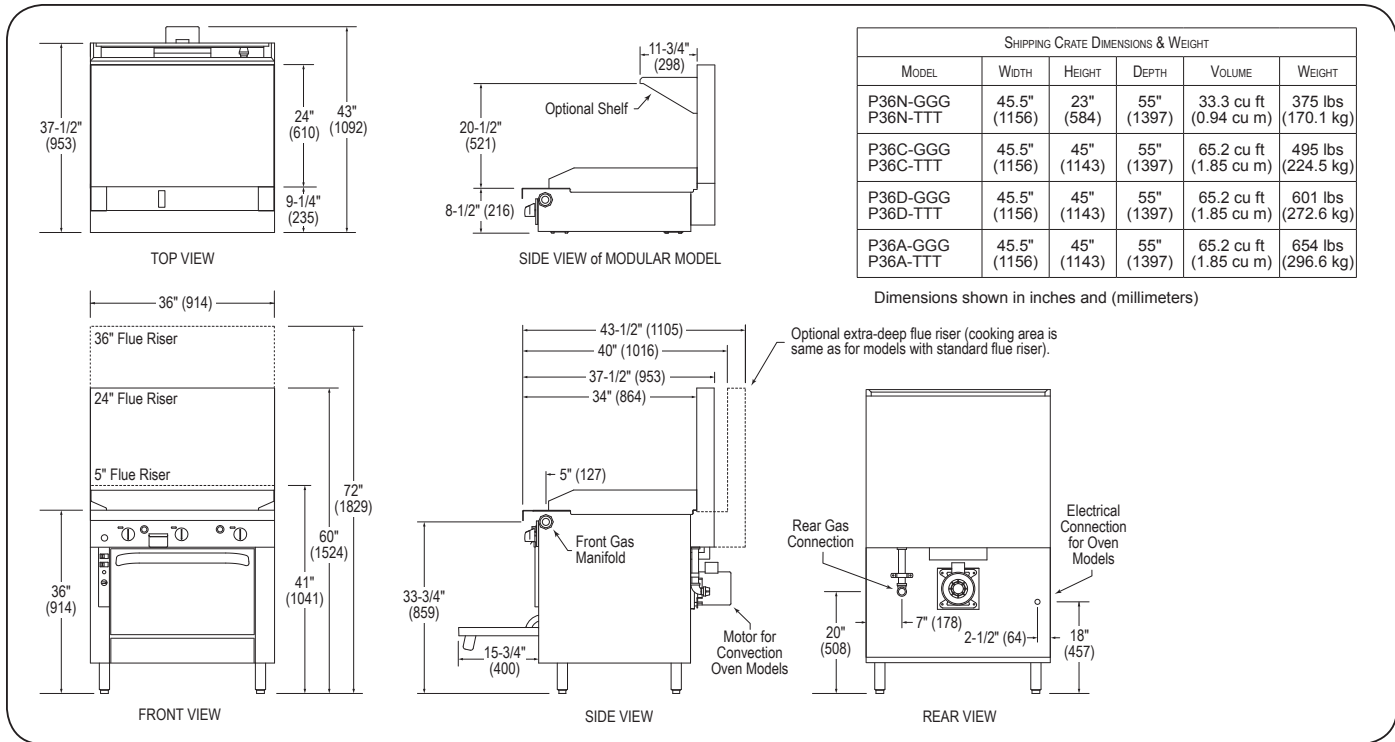

UTILITY INFORMATION

GAS: Each unit has a 1-1/4" front manifold that couples to the adjacent sectional unit(s), and a 1" rear gas connection with a male NPT connector. Minimum gas supply pressure is 7" W.C. for natural gas and 11" W.C. for propane. All sectional units

| MODEL | GAS (BTU/HOUR) | | ELECTRICITY (AMPS) | |
|----------------------|----------------|---------|--------------------|----------|
| | NATURAL | PROPANE | 120V | 208/240V |
| P36N-GGG P36N-TTT | 96,000 | 84,000 | - | - |
| P36C-GGG P36C-TTT | 96,000 | 84,000 | - | - |
| P36D-GGG P36D-TTT | 141,000 | 126,000 | 0* | 0* |
| P36A-GGG P36A-TTT | 141,000 | 126,000 | 3.8* | 1.6* |

*Standing Oven Pilot Models

require a regulated gas supply (a pressure regulator must be ordered separately). If using a flexible-hose gas connection, the inside diameter of the hose must not be smaller than the connector on the unit and must comply with ANSI Z21.69, providing an adequate means of restraint to prevent undue strain on the gas connection.

ELECTRICITY: All oven models with optional electronic ignition require 50Hz or 60Hz single-phase power. 120V models have a 7-foot power cord with ground plug (1.0A for "D" models & 4.8A for "A" models). 208/240V models have a terminal block for connection to a single-phase 208/240V source (1.0A for "D" models & 2.6A for "A" models).

MISCELLANEOUS

- If casters are used with a flexible-hose gas connection, a restraining device should be used to prevent undue strain on the hose.
- Minimum clearance from noncombustible construction is zero (except there must be 2" clearance behind the blower motor of convection-oven models). Minimum clearance from combustible construction is 10" (254 mm) on sides and 6" (152 mm) on rear.
- Installation under a vented hood is recommended.
- Check local codes for fire and sanitary regulations.

NOTICE:

Southbend has a policy of continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

OPTIONS and ACCESSORIES

- External pressure regulator
- Front rail options:
 - Cutouts in front rail for sauce pans
 - 7-1/4" deep front rail (to match old style sectional)
 - Square belly bar mounted on 7-1/4" deep front rail
- Casters (front two casters lock)
- Cable restraint kit (to restrict movement when on casters)
- 24" or 36" high flue riser
- Shelves on flue riser (one on 24" flue riser, one or two on 36" flue riser)
- Tray or tubular shelves
- Open-frame base with casters for battery
- Extra-deep rear-extending flue riser
- Stainless steel oven interior
- Salamander or cheesemelter mounted on 36" high flue riser
- Removable shelf inside cabinet
- Grooved griddle surface
- Chrome griddle surface
- Electronic oven pilot ignition
- 120V, NEMA 4 water resistant controls

**INTENDED FOR COMMERCIAL USE ONLY.
NOT FOR HOUSEHOLD USE.**



1100 Old Honeycutt Road, Fuquay-Varina, NC 27526
(919) 762-1000 www.southbendnc.com